


CFM-SERIES

Applications

- Perfect for applications with varying cable diameter
- Suppression of electronic ballasts in the lighting industry
- Reusable thanks star-key technology, ideal for testing and measuring purposes in EMC laboratories


Picture

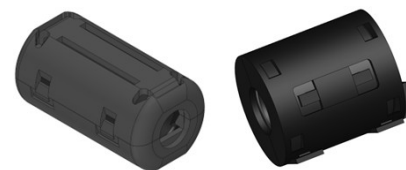

Environmental data

- Operating temperature range : -25°C ~ +105°C
- Storage conditions (packaged) : -25°C ~ +40°C, ≤75% RH
- Complies with AEC-Q200 standard

Dimensions

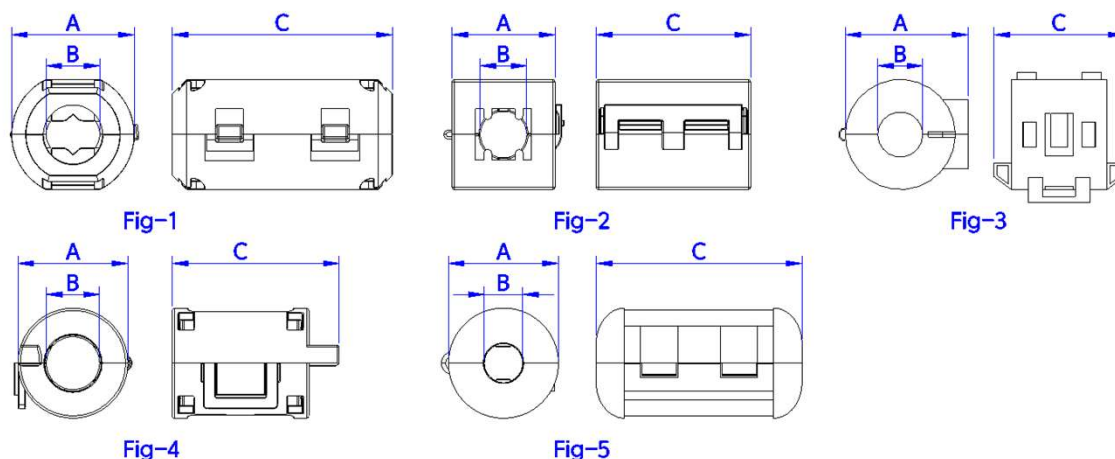

Specifications

Part Number	Fig	Dimensions(mm)			Color	Shape	Impedance(Ω) Min.	
		A	B	C			25MHz	100MHz
CFMC17-6.15-36	5	17.0	6.15	36.0	Black	Circle	142	235
CFMC20-6.6-39.5	5	20.0	6.6	39.5	Black	Circle	151	260
CFMC23.5-9.5-39.5	5	23.5	9.5	39.5	Black	Circle	121	202
CFMC32.5-12.95-39.5	5	32.5	12.95	39.5	Black	Circle	132	220

Notes

- * All test data is referenced to 25 °C ambient
- * Test conditions : Ø0.65 copper wire 1Ts