

CMFP3225-SERIES




Applications

- DC/DC Converter
- Power supply systems
- Various electronic devices
- DC low voltage power lines
- Multimedia devices
- Safety applications, etc.


Environmental data

- Operating temperature range : -40°C ~ +125°C(component)
- Storage conditions (packaged) : -25°C ~ +40°C, ≤75% RH
- Complies with AEC-Q200 standard


Dimensions [Unit : mm]

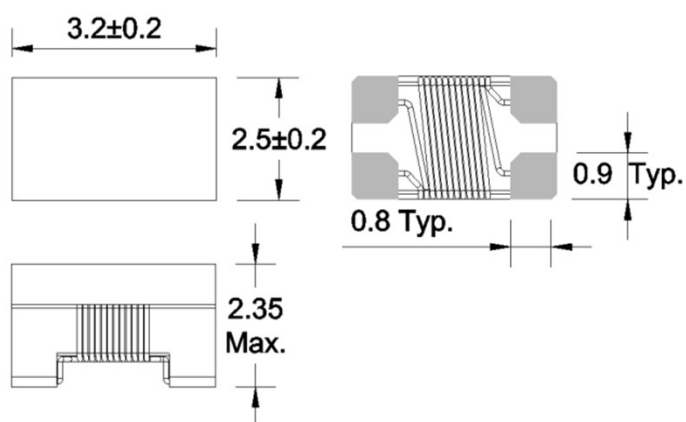

Picture

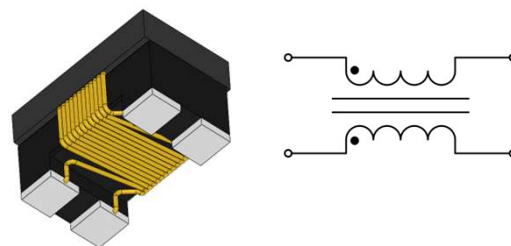

Land Pattern [Unit : mm]

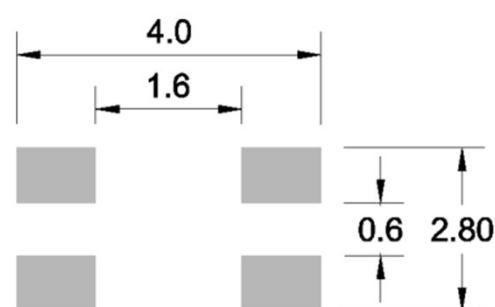

Specifications

Part No.	Common mode impedance(Ω) 100MHz	DCR (mΩ)	Heating Rating Current DC(A) a)	Insulation resistance (MΩ)	Rated voltage (Vdc)
		MAX.	MAX.	MIN.	MAX.
CMFP3225-800	80±25%	120	0.64	10	50
CMFP3225-161	160±25%	150	0.48	10	50
CMFP3225-271	270±25%	250	0.45	10	50
CMFP3225-501	500±25%	300	1.0	10	50
CMFP3225-601	600±25%	200	1.0	10	50
CMFP3225-801	800±25%	350	0.35	10	50
CMFP3225-102	1,000±25%	350	0.48	10	50

Notes

* All test data is referenced to 25 °C ambient

a) DC current (A) that will cause an approximate ΔT of 40 °C

CMFP3225-SERIES

■ Performance Graph

— Differential Mode
— Common Mode

